

Frame fixing S-RL-Z



Usage

Approved for:

- Concrete
- Solid brick
- Solid sand-lime brick
- Solid block made from lightweight concrete
- Hollow block made from lightweight concrete
- Lightweight concrete

Also suitable for:

- Natural stone with dense structures
- Solid panel made from gypsum

For fixing of:

- Facade and roof substructures made of wood and metal
- Gates
- Door frames
- Fire protection doors
- Windows
- Kitchen cabinets
- Wardrobes
- Squared timbers
- Facings




Description

- Nylon expansion frame fixing.
- fischer A4 stainless steel safety screw for external use and in damp conditions.


Installation

Type of installation

- Push-through installation

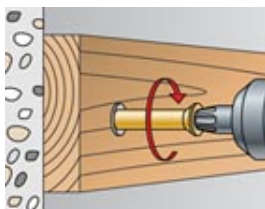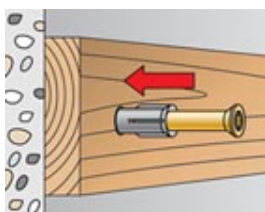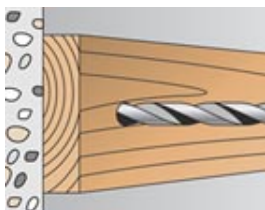

Technical data

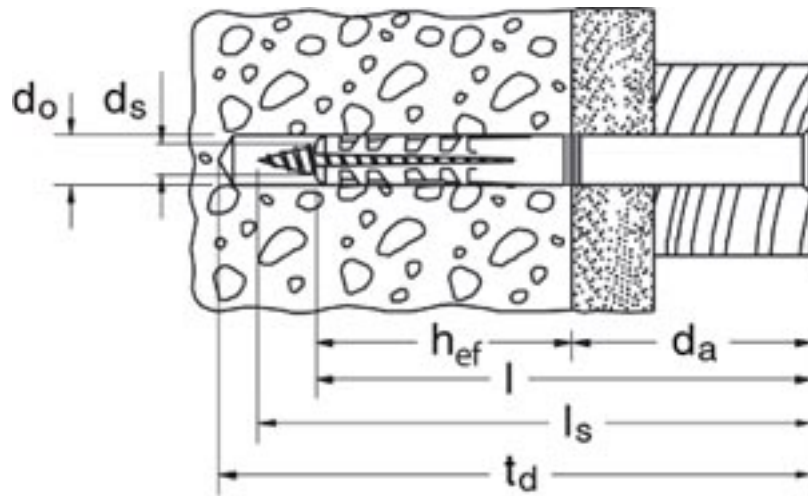

Type	Art.-No.	ETA DIBt	drill d_o [mm]	min. drill hole depth t_d [mm]	effect. anchoring depth h_{ef} [mm]	anchor length l [mm]	max. usable length t_{fix} [mm]	fischer safety screw $d_s \times l_s$ [mm]		EAN Code
S 10 RL 100 Z	88601	●	10	110	50	100	50	7 x 105	39269098	4006209886014
S 10 RL 115 Z	88602	●	10	125	50	115	65	7 x 120	39269098	4006209886021
S 10 RL 135 Z	88603	●	10	145	50	135	85	7 x 140	39269098	4006209886038
S 10 RL 160 Z	88604	●	10	170	50	160	110	7 x 165	39269098	4006209886045